





DP15IR

IR LED Mini Dome Camera



56 high-intensity infrared LEDs provide illumination in low-light situations



Digital Day / Night capability



650 TVL resolution for maximum image quality



IP66 rated construction and integrated heater to withstand tough weather conditions for outdoor installation



Digital Wide Dynamic Range (D-WDR) provides superior image clarity in drastic lighting conditions





Optional Verifocal lens for flexibility in installation



DP15IR

IR LED Mini Dome Camera

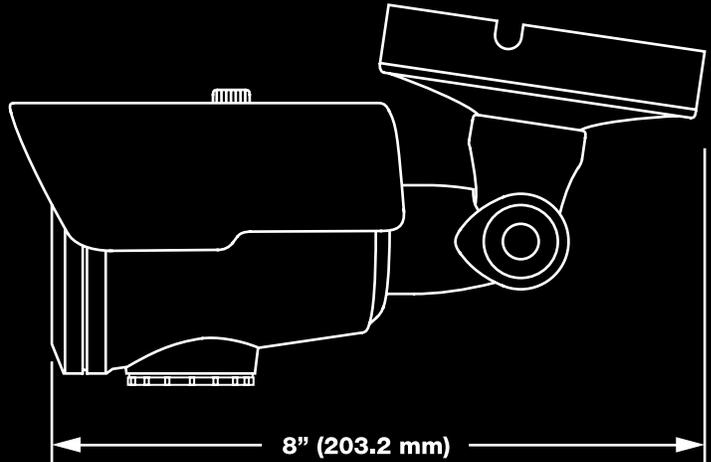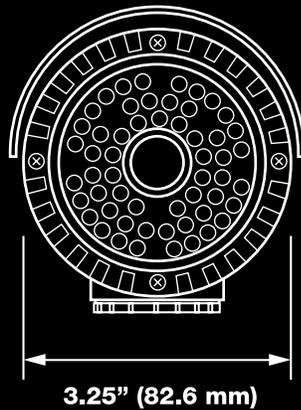

Camera Specifications		
Model	DP15IR	DP15IRV
Image Sensor	1/3" Sony CCD	
IP Rating	IP66	
Wide Dynamic Range	D-WDR	
Day / Night	Digital Day / Night	
Resolution	650 TVL	
Focal Length	4mm Fixed	3mm ~ 9mm Varifocal Lens
Iris Control	Auto Iris	
Auto White Balance Range	2700K ~ 9500K	
Backlight Compensation	Yes	
Auto Gain Control	Auto	
Operating Temperature	14° ~ 122° F (-10° ~ 50° C)	
Heater	No	
Input Voltage	12vDC	
Dimensions	3.44 in. x 3.7 in. x 4 in. (87.4mm x 93.2mm x 101.7mm)	
FOV	Tilt = 90° Rotation = 350°	
IR LED	56	
IR Range	< 50 ft. (15m)	

AvertX

509-777-6736

www.avertx.com

31316AA

Copyright © 2012 AvertX. All rights reserved. Information contained in this document is subject to change without prior notice. AvertX does its best to provide accurate information, but cannot be held responsible for typos or mistakes.

