




## HD30

### High Definition Network Dome Camera



1080p High Definition for professional quality detail



With Power over Ethernet, both video and power travel along one cable




Digital Day / Night capability for 24-hour surveillance



IP66 rated construction and integrated heater to withstand tough weather conditions for outdoor installation



Digital Wide Dynamic Range (D-WDR) provides superior image clarity in drastic lighting conditions





Dual Streaming allows simultaneous H.264 and MJPEG transmission



## HD30

### High Definition Network Dome Camera

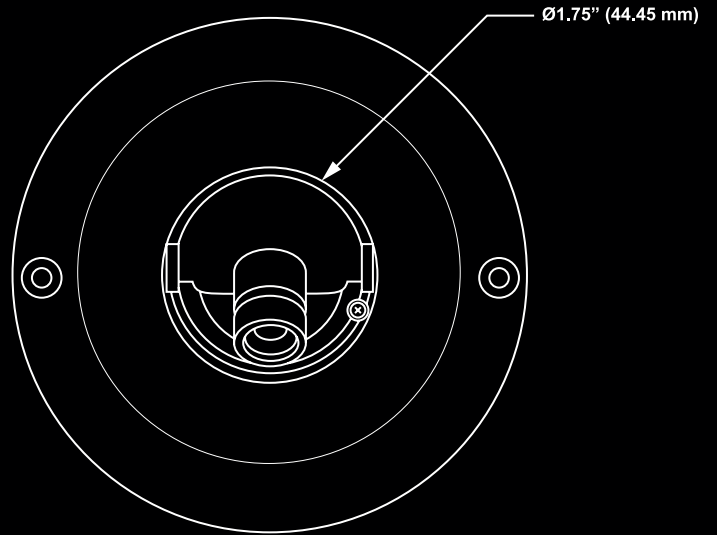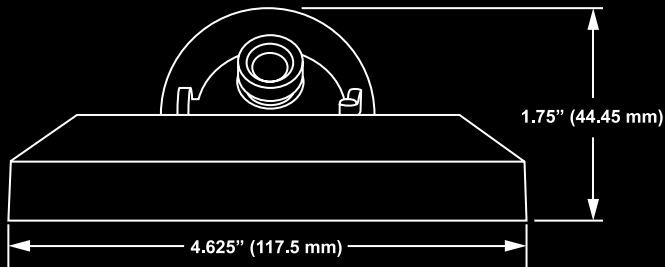

Camera Specifications	
Model	HD30
Image Sensor	1 / 2.7" CMOS
IP Rating	IP66
Wide Dynamic Range	Digital Wide Dynamic Range
Minimum Illumination	0.6 Lux @ 50IRE; 0.1 Lux @ 30IRE
Day / Night	Digital Day / Night
Resolution	1080p [1920 x 1080 / 2MP], 1280 x 1024 (1.3 MP), 720p {1280 x 720 / 1MP}, D1 {720 x 480}, CIF [352 x 240]
Service Monitor Jack	No
Focal Length	4mm Fixed
Iris Control	Auto
White Balance	Manual / AWB / ATW
Auto White Balance Range	2700K ~ 7800K
Backlight Compensation	No
Auto Gain Control	Auto
Operating Temperature	14° ~ 122° F (-10° ~ 50° C)
Heater	No
Power Consumption	3.5W
Rated Amperage	0.073A
Input Voltage	PoE Only
Weight	0.4 lbs (180g)
Dimensions	Ø 4.625" (117.5 mm) x H 1.75" (44.45 mm)



1-855-2avertX  
(1-855-228-3789)

www.avertx.com

31566AA

Copyright © 2012 AvertX. All rights reserved. Information contained in this document is subject to change without prior notice. AvertX does its best to provide accurate information, but cannot be held responsible for typos or mistakes.