

C3212D4-S

4MP OUTDOOR IP DOME CAMERA



TRUE WDR

True Wide Dynamic Range (WDR) provides superior image clarity in drastic lighting conditions



Intelligent person and vehicle detection analytics using AI deep learning



High-intensity infrared LEDs provide illumination in low-light environments



Two-Way Audio capable with built-in mic and external speaker connectors




Tough IP67 and IK10 rated construction will withstand tough weather conditions and vandalism for exposed installation locations



C3212D4-S

4MP OUTDOOR IP DOME CAMERA

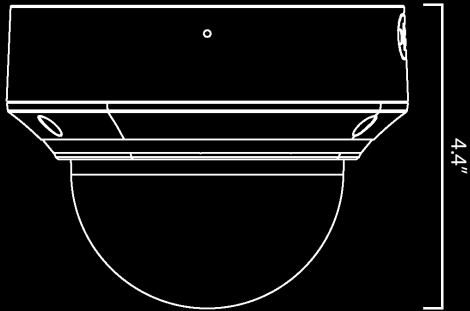

Camera Specifications

Model Number	C3212D4-S
Max Resolution	2688x1520
Image Sensor	1/3", 4MP, Progressive Scan CMOS
Lens	2.7 ~ 13.5mm VF, AF, Motorized Zoom Lens
Aspect Ratio	16:9
Field Of View	104° ~ 30°
Compression	H.264/MJPEG
Max Frame Rate	Primary Stream: 30FPS @ 2688x1520
Day/Night	Auto/Day/Night
Wide Dynamic Range (WDR)	True WDR @ 4MP, 120dB
White Balance	Auto/Manual/Scene
IR	Adaptive IR Up to 131'
Analytics	Person & Vehicle Smart Analytics
Configurable Video Profiles	Main Profile, High Profile
Operating Temperature	-22°F ~ 140°F (-30°C ~ 60°C)
Humidity	95% RH (Non-condensing)
Power Consumption	Max 7W
Power Source	PoE (IEEE 802.3af) DC 12V±25%
Audio In/Out	1/1 Built-in Mic
Two-way Audio	Yes
Weight	2lbs (0.92kg)
Dimensions	Ø5.8" x 4.4" (Ø148 x 111mm)
Housing/Dome Cover	Metal/Polycarbonate
Ingress Protection	IP67
Impact Rating	IK10
Pan/Tilt/Rotate	Pan: 0° ~ 355° Tilt: 0° ~ 80° Rotate: 0° ~ 355°
Certifications	UL/cUL/FCC/NDAA
Country of Origin	China



1-855-2AVERTX
(1-855-228-3789)

www.avertx.com

38310 AA

Copyright © 2025 AvertX. All rights reserved. Information contained in this document is subject to change without prior notice. AvertX does its best to provide accurate information, but cannot be held responsible for typos or mistakes.