

C2212B4

4MP OUTDOOR VARIFOCAL IP BULLET CAMERA



True Wide Dynamic Range (WDR) provides superior image clarity in drastic lighting conditions



With Power over Ethernet, both video and power travel along one cable for easy installation



High-intensity infrared LEDs provide illumination in low-light environments



Two-Way Audio capable with built-in mic and external speaker connectors




Tough IP67 rated construction will withstand tough weather conditions for exposed installation locations



C2212B4

4MP OUTDOOR VARIFOCAL IP BULLET CAMERA

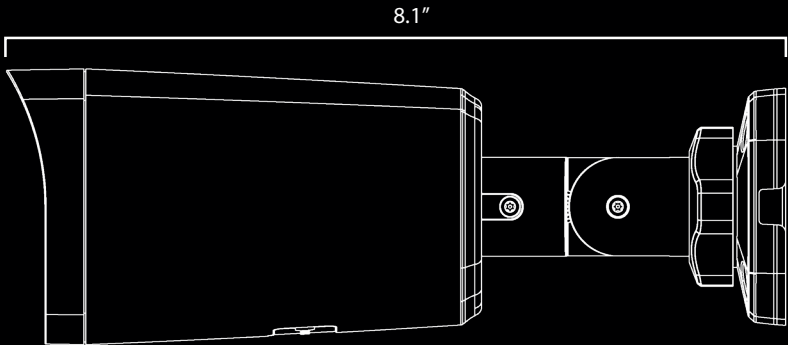

Camera Specifications

Model Number	C2212B4
Max Resolution	2688x1520
Image Sensor	1/3", 4MP, Progressive Scan, CMOS
Lens	2.8 ~ 12mm, VF, AF, Motorized Zoom Lens
Aspect Ratio	16:9
Field Of View	86° ~ 36°
Compression	H.264/MJPEG
Max Frame Rate	Primary Stream: 30FPS @ 2688x1520
Day/Night	Auto/Day/Night
Wide Dynamic Range (WDR)	True WDR @ 4MP, 120dB
White Balance	Auto/Manual/Scene
IR	Adaptive IR Up to 164'
Configurable Video Profiles	Main Profile, High Profile
Operating Temperature	-22°F ~ 140°F (-30°C ~ 60°C)
Humidity	95% RH (Non-condensing)
Power Consumption	Max 9.6W
Power Source	PoE (IEEE 802.3af) DC 12V±25%
Audio In/Out	1/1 Built-in Mic
Two-way Audio	Yes
Weight	1.12lbs (0.51kg)
Dimensions	8.1" x 2.9" x 2.9" (206 x 73mm x 73mm)
Housing/Dome Cover	Graphene and Metal
Ingress Protection	IP67
Pan/Tilt/Rotate	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotate: 0° ~ 360°
Certifications	UL/cUL/FCC/NDAA
Country of Origin	China



1-855-2AVERTX
(1-855-228-3789)

www.avertx.com

38313 AA

Copyright © 2025 AvertX. All rights reserved. Information contained in this document is subject to change without prior notice. AvertX does its best to provide accurate information, but cannot be held responsible for typos or mistakes.