

## C2214B4

4MP OUTDOOR FIXED IP BULLET CAMERA





True Wide Dynamic Range (WDR) provides superior image clarity in drastic lighting conditions



With Power over Ethernet, both video and power travel along one cable for easy installation



High-intensity infrared LEDs provide illumination in low-light environments




Internal microphone to hear and record sound



Tough IP67 rated construction will withstand tough weather conditions for exposed installation locations



## C2214B4 4MP OUTDOOR FIXED IP BULLET CAMERA

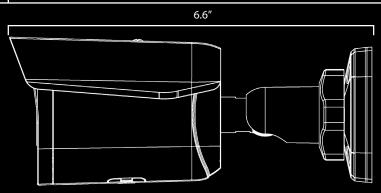

## Camera Specifications

Camera Specifications	
Model Number	C2214B4
Max Resolution	2560x1440
Image Sensor	1/2.9", 4MP, Progressive Scan, CMOS
Lens	2.8mm Fixed Lens
Aspect Ratio	16:9
Field Of View	101.5°
Compression	H.264/MJPEG
Max Frame Rate	Primary Stream: 30FPS @ 2560x1440
Day/Night	Auto/Day/Night
Wide Dynamic Range (WDR)	True WDR @ 4MP, 120dB
White Balance	Auto/Manual/Scene
IR	Adaptive IR   Up to 98'
Configurable Video Profiles	Main Profile, High Profile
Operating Temperature	-22°F ~ 140°F (-30°C ~ 60°C)
Humidity	95% RH (Non-condensing)
Power Consumption	Max 5.5W
Power Source	PoE (IEEE 802.3af)   DC 12V±25%
Audio In/Out	Built-in Mic
Weight	.86lbs (0.39kg)
Dimensions	6.6" x 2.7" x 2.4" (168 x 68mm x 60mm)
Housing/Dome Cover	Graphene and Metal
Ingress Protection	IP67
Pan/Tilt/Rotate	Pan: $0^{\circ} \sim 360^{\circ}$ Tilt: $0^{\circ} \sim 90^{\circ}$ Rotate: $0^{\circ} \sim 360^{\circ}$
Certifications	UL/cUL/FCC/NDAA
Country of Origin	China



1-855-2AVERTX (1-855-228-3789)

www.avertx.com

38314 AA

Copyright © 2025 AvertX. All rights reserved. Information contained in this document is subject to change without prior notice. AvertX does its best to provide accurate information, but cannot be held responsible for typos or mistakes.